
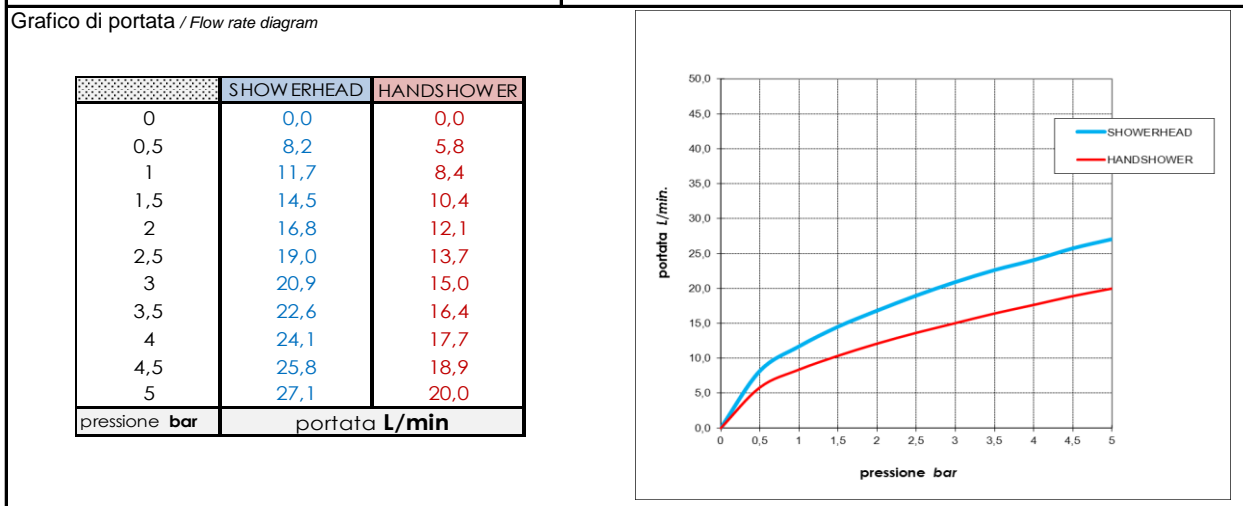


	<b>SCHEDA TECNICA</b> TECHNICAL SHEET	Date: 09/07/2018	Rev/0

<b>Codice / Code:</b> <b>H89405</b>	<b>Descrizione / description:</b> Braccio doccia girevole in ottone 1/2" MM con sistema di deviazione integrato, soffione OKI Ø 200 mm, doccia Zen, supporto fisso e flessibile doppia aggiratura cm 150  <i>Swivel brass arm 1/2" MM with integrated diverter system, OKI Ø 200 mm shower head, Zen hand shower, fixed bracket, double interlock brass hose cm 150</i>
--	--

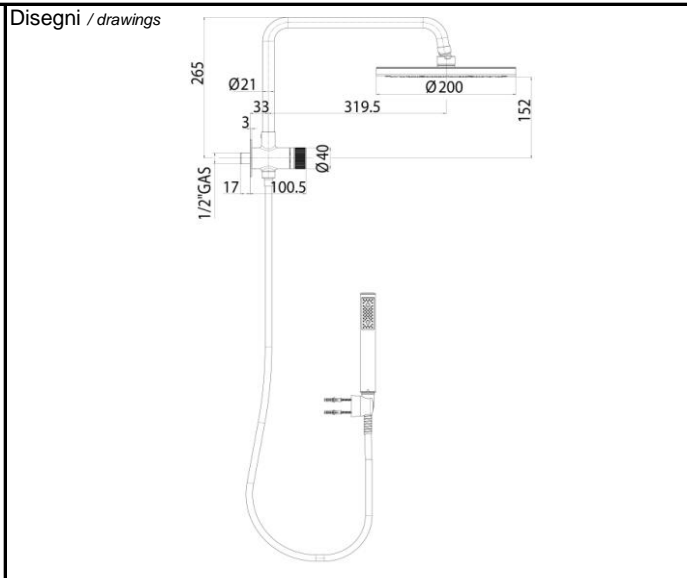

**MATERIALI / materials**

**Braccio doccia H89000 e deviatore:** Ottone; **Soffione I00405:** Acciaio inox, Plastica (POM), Ottone, Gomma (EPDM); **Doccia B00250:** Ottone, Plastica (ABS, POM, Nylon), Silicone; **Flessibile A03045:** Ottone, Gomma, PVC;

**Swivel arm H89000 and diverter :** Brass; **Shower head I00405 :** Stainless Steel, Plastic (POM), Brass, Rubber (EPDM); **Handshower B00250 :** Brass, Plastic (ABS, POM, Nylon), Silicone; **Hose A03045 :** Brass, Rubber, PVC;

**CARATTERISTICHE IDRAULICHE / hydraulic features**

	pressione pressure	portata flow rate	temperatura temperature	<i>solo per miscelatori termostatici</i> <i>only for thermostatic mixers</i>	
min	<b>1 bar</b>	/	/	Blocco di sicurezza safety lock	/
max	<b>5 bar</b>	/	<b>&lt;70°C</b>	Temperatura acqua fredda cold water temperature	/
consigliata recommended	<b>2-3 bar</b>	<b>9L/min</b>	/	Temperatura acqua calda hot water temperature	/

**CERTIFICAZIONI / CERTIFICATIONS:**  
**Handshower B00250, Showerhead I00405 :** ACS (France), CSA, IAPMO[ASME A112.18.1/CSA B125.1](CAN/USA), NF [EN 1112] (FRA), Watermark [AS/NZS 3662:2005] (AUS); **Hose A03045:** ACS (France), NF [EN 1113] (FRA);

**CONFORMITA' / CONFORMITY .**  
 Chrome plating - EN 248