



BOSSINI
HIGH QUALITY SHOWER SYSTEMS

SCHEDA TECNICA - TECHNICAL SHEET

16/11/2023

Rev: 0

Codice - Code:

INZ204

INOX LINE single lever mixer Ø35 (Tall) for wash basins

Descrizione - Description:

Miscelatore monocomando INOX LINE lavabo Ø35 (Tall) con aeratore M16,5x1. Scarico 1"1/4 click-clack e flessibili inox 3/8" F

INOX LINE single lever basin mixer Ø35 (Tall) with M16,5x1 aerator. 1"1/4 click-clack waste and 3/8" F stainless steel flexible hoses

Tecnologia - Technology:

Einhebel Waschtischmischer INOX LINE Ø35 (Tall) mit Strahlregler M16,5x1 und Ablaufventil 1"1/4, 3/8" iG Schläuche aus Edelstahl

Mitigeur monocommande INOX LINE lavabo Ø35 (Tall) avec aérateur M16,5x1. Vidage 1"1/4 et flexibles en acier inoxydable 3/8" F

Mezclador monomando INOX LINE lavabo Ø35 (Tall) con aireador M16,5x1. Desagüe 1"1/4 y flexibles en acero inox 3/8" F

Смеситель монорычажный INOX LINE для раковины Ø35 (Tall) с аэратором M16,5x1. Донный клапан 1"1/4 и гибкая подводка из нерж. стали 3/8" F

Immagine Prodotto - Product Image



Disegni - Drawings


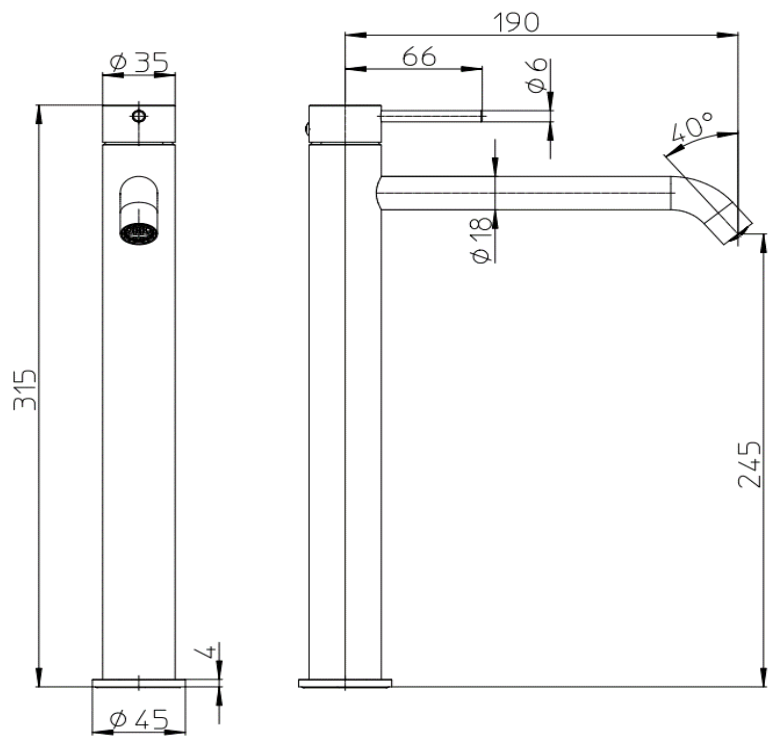


Grafico di portata - Flow rate diagram

	out
0	0,0
0,5	1,8
1	2,9
1,5	3,7
2	4,2
2,5	4,6
3	4,6
3,5	4,8
4	4,8
4,5	5,0
5	5,0
pressione bar	portata L/min

**Portata determinata con miscelazione 50/50
calda e fredda**

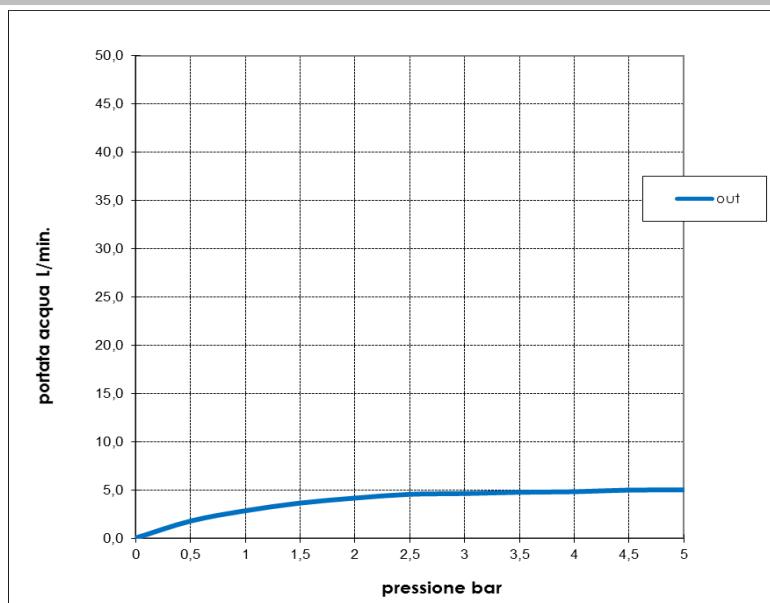

Caratteristiche idrauliche - Hydraulic features

	Pressione Pressure	Portata Flow rate
min	1 bar	2,9 L/min
max	5 bar	5 L/min
Portata minima consigliata per buon funzionamento <i>Recommended minimum flow-rate for optimal performance</i>		--

Solo per miscelatori termostatici Only for thermostatic mixers	
Blocco di sicurezza Safety lock	--
Temperatura acqua fredda Cold water temperature	--
Temperatura acqua calda Hot water temperature	--

Materiali - Materials

Miscelatore: Acciaio inox AISI316L
Manopola: Acciaio inox AISI316L
Basetta: Acciaio inox AISI316L

Faucet: *Stainless steel AISI316L*
Handle: *Stainless steel AISI316L*
Washer: *Stainless steel AISI316L*

Certificazioni - Certifications

Conformità - Conformity

Faucet - EN817